

# THE PLATINUM SERIES

# Jindara®

WOODHEATING



10 YEAR FIREBOX WARRANTY



WHEN FUNCTIONALITY MEETS INNOVATION  
- THE RESULT IS TIMELESS -

# MODULE - EXCITE

INNOVATION, STYLE & CONTEMPORARY DESIGN




BENCH DIMENSIONS  
1200mm WIDE  
280mm HIGH  
550mm DEEP


● EFFICIENCY 80% <sup>+</sup>	▲ EMISSIONS 0.9 g/kg	■ CAPACITY 260m <sup>2</sup>	● EFFICIENCY 76% <sup>+</sup>	▲ EMISSIONS 1.3 g/kg	■ CAPACITY 330m <sup>2</sup>
----------------------------------	-------------------------	---------------------------------	----------------------------------	-------------------------	---------------------------------

## TILGA MEDIUM

TOP VIEW




FRONT VIEW




## GRANGE LARGE

TOP VIEW



FRONT VIEW



## SPECIFICATIONS

MODULE TYPE	FLUE TYPE	CLEARANCE TO COMBUSTIBLES			MINIMUM HEARTH SIZE			
		REAR	SIDE	CORNER	WIDTH	DEPTH	THICKNESS	MM IN FRONT
TILGA MEDIUM	SOLID	155*	325	50	945	1005	140	330
TILGA MEDIUM	PERFORATED	50	325	75	945	900	140	330
GRANGE LARGE	SOLID	50	325	50	1000	898	140	330
GRANGE LARGE	PERFORATED	50	325	50	1000	898	140	330
TILGA ON BENCH	SOLID	155*	325	50	945	1005	9	300#
TILGA ON BENCH	PERFORATED	50	325	75	945	900	9	300#
GRANGE ON BENCH	SOLID	50	325	50	1000	900	9	300#
GRANGE ON BENCH	PERFORATED	50	325	50	1000	900	9	300#

## FLUE TYPE DEFINITIONS

# IN FRONT OF BENCH

**SOLID** = 6" TRIPLE SKIN (DEFAULT) FLUE KIT INCORPORATING A NON-PERFORATED PAINTED OUTER FLUE CASING BELOW CEILING LEVEL  
 \*NOTE: 180 DEG. STAINLESS STEEL FLUE SHIELDING (900mm LONG INCLUDED IN WOODHEATER) **MUST NOT** BE USED FOR THE TILGA FREESTANDING & MODULE BUT **MUST BE** USED FOR GRANGE FREESTANDING & MODULE

**PERFORATED** = 6" TRIPLE SKIN (DEFAULT) FLUE KIT INCORPORATING A 180 DEG. PERFORATED PAINTED OUTER FLUE CASING WITH SOLID BACK BELOW CEILING LEVEL  
 \*NOTE: 180 DEG. STAINLESS STEEL FLUE SHIELDING (900mm LONG INCLUDED IN WOODHEATER) **MUST BE** USED BETWEEN THE FIRST LENGTH OF ACTIVE FLUE & THE OUTER PERFORATED CASING DIRECTLY OFF THE APPLIANCE

# FREESTANDING

FUNCTIONALITY IS THE FOUNDATION



● EFFICIENCY  
80%\*

▲ EMISSIONS  
0.9 g/kg

■ CAPACITY  
260m<sup>2</sup>


● EFFICIENCY  
76%\*

▲ EMISSIONS  
1.3 g/kg


■ CAPACITY  
330m<sup>2</sup>

## TILGA MEDIUM

TOP VIEW




FRONT VIEW




## GRANGE LARGE

TOP VIEW



FRONT VIEW



## SPECIFICATIONS

FREESTANDING	FLUE TYPE	CLEARANCE TO COMBUSTIBLES			MINIMUM HEARTH SIZE			
		REAR	SIDE	CORNER	WIDTH	DEPTH	THICKNESS	MM IN FRONT
TILGA MEDIUM	SOLID	155*	325	50	945	1000	9	300
TILGA MEDIUM	PERFORATED	50	325	75	945	895	9	300
GRANGE LARGE	SOLID	50	325	50	1000	895	9	300
GRANGE LARGE	PERFORATED	50	325	50	1000	895	9	300

## FLUE TYPE DEFINITIONS

### SOLID

= 6" TRIPLE SKIN (DEFAULT) FLUE KIT INCORPORATING A NON-PERFORATED PAINTED OUTER FLUE CASING BELOW CEILING LEVEL

\*NOTE: 180 DEG. STAINLESS STEEL FLUE SHIELDING (900mm LONG INCLUDED IN WOODHEATER) **MUST NOT** BE USED FOR THE TILGA FREESTANDING & MODULE BUT **MUST BE** USED FOR GRANGE FREESTANDING & MODULE

### PERFORATED

= 6" TRIPLE SKIN (DEFAULT) FLUE KIT INCORPORATING A 180 DEG. PERFORATED PAINTED OUTER FLUE CASING WITH SOLID BACK BELOW CEILING LEVEL

\*NOTE: 180 DEG. STAINLESS STEEL FLUE SHIELDING (900mm LONG INCLUDED IN WOODHEATER) **MUST BE** USED BETWEEN THE FIRST LENGTH OF ACTIVE FLUE & THE OUTER PERFORATED CASING DIRECTLY OFF THE APPLIANCE

# INSERT - IMPRESS

THE NEW PLATINUM SERIES FROM JINDARA WOODHEATING



ZERO CLEARANCE INSERT  
FASCIA DEPTH 3mm (FLUSH FIT)



MASONRY INSERT  
FASCIA DEPTH 16mm



**EFFICIENCY**  
74%<sup>†</sup>



**EMISSIONS**  
1.0 g/kg



**CAPACITY**  
240m<sup>2</sup>



**EFFICIENCY**  
68%<sup>†</sup>




**EMISSIONS**  
1.4 g/kg




**CAPACITY**  
300m<sup>2</sup>

## TILGA MASONRY - MEDIUM

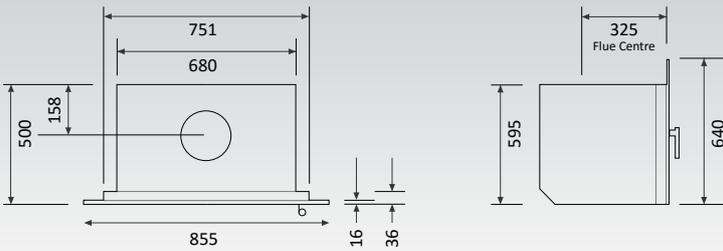


## GRANGE MASONRY - LARGE

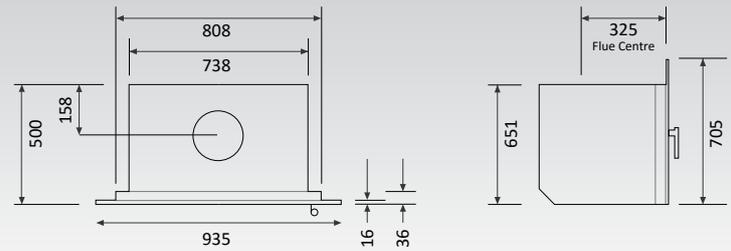


## SPECIFICATIONS


INSERT	CLEARANCE TO COMBUSTIBLES			MINIMUM HEARTH SIZE			
	SIDE UPRIGHTS FROM FASCIA EDGE	TO MANTLE SHELF FROM HEARTH	TO BREAST PLATE FROM HEARTH	WIDTH	DEPTH	THICKNESS	MM IN FRONT
TILGA MASONRY	55	1500 <sup>†</sup>	1410	945	550	18	550 <sup>+</sup>
TILGA ZERO CLEARANCE	55	1500 <sup>†</sup>	1410	945	1185	18	550 <sup>+</sup>
GRANGE MASONRY	35	1500 <sup>†</sup>	1410	1000	520	18	520 <sup>+</sup>
GRANGE ZERO CLEARANCE	35	1500 <sup>†</sup>	1410	1000	1135	18	520 <sup>+</sup>

## TILGA ZERO CLEARANCE - MEDIUM

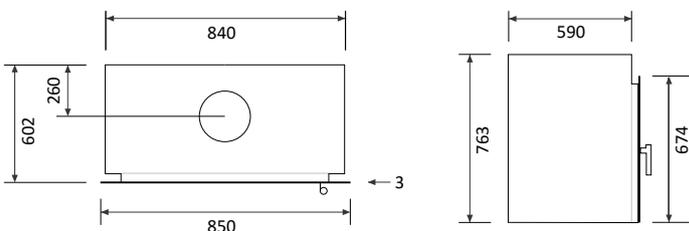

## GRANGE ZERO CLEARANCE - LARGE

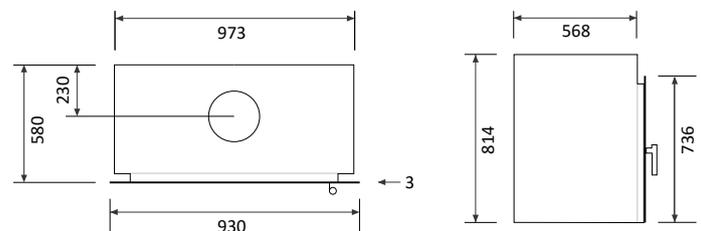

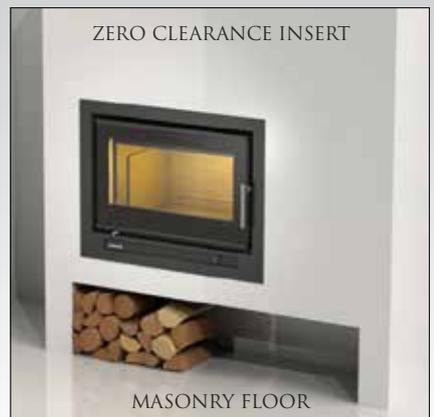

EXCITE  
PERSONALISE  
ADVANCE FOCUS RISE  
CELEBRATION  
IMPRESS

# STYLISH, MODERN & INNOVATIVE

- DESIGNED & MANUFACTURED IN ARARAT, VICTORIA -
- HIGH OUTPUT & EFFICIENCY COMBINED WITH LOW EMISSIONS -
- SLEEK & MODERN DESIGN FEATURES UTILISING THE LATEST IN MANUFACTURING TECHNOLOGY -
  - FULL GLASS FRONTED DOOR FOR MAXIMUM VIEWING AREA -
  - DUAL-ACTION LATCHING MECHANISM WITH SAFETY POSITION -
- 6MM FULLY WELDED STEEL FIREBOX WITH A DUAL PRE-HEATED PRIMARY AIR CHAMBER -
  - 3 SPEED POWERFUL FAN WITH THERMOSTATIC CONTROL -
- COMPACT DIMENSIONS & CLEARANCES FOR EASE OF INSTALLATION -
- CAST IRON FIREBOX LINERS TO ENSURE MAXIMUM FIREBOX HEAT RETENTION & EFFICIENCIES -
  - OPTIONS IN SOLID OR PERFORATED FLUE -

Note: The dimensions and clearances are for reference only. Refer to the Owner's Manual for operation and exact specifications prior to installation. Colours of woodheaters shown are as close as four colour process printing methods allow. Zero clearance options are available for all Insert models, consult your local dealer for further information. Installation should be carried out by a qualified installer. Flue kits to be installed strictly in accordance with AS/NZS 2918. All fireplace Inserts must be installed in a brick masonry chimney or Jindara Zero Clearance Cabinet and be fully flued. Jindara woodheaters conform to AS/NZS 2918, AS/NZS 4012/4013, however Jindara accepts no liability whatsoever for interpretation. All heating capacities quoted are based on units tested with quality hardwood. Performance reduction may result due to large glassed areas, vaulted ceilings, drafts or insufficient insulation. Jindara Woodheating reserves the right to change specifications without notice. All dimensions and clearances are in millimetres (mm). \* Peak efficiency % quoted. † Mantle deflector required, refer to the relevant installation instructions. ‡ Minimum hearth depth in front of unit can be reduced by raising appliance above combustible materials.



AF Gason Pty Ltd  
Phone: 03 9763 3200  
Fax: 03 9763 0836  
jindara@gason.com.au  
www.jindara.com.au

Your Platinum Jindara Dealer

