


STEEL PANEL RADIATORS



HIGH PERFORMANCE AND DESIGN

Steel panel radiators are not only high performance – elegance, superb finish and design are an integral part of the completed product.

What you and your family want most from a radiator – is to create a warm and comfortable home as quickly as possible and to be economical to run. Convector fins welded directly to the waterways increase the effective heating surface area – which in turn results in a significantly quicker warm up time for your home.

If you need confirmation of quality, every De Longhi panel has a 15 year guarantee against design or manufacturing defects from the date of installation.

finishes

High gloss white, unique finish both scratch and corrosion-resistant.

measurements

Heights from 300mm to 900mm.

Widths from 400mm up to 3000mm.


Available as single, compact, double and triple panels.

For full details PTO




DE LONGHI RADIATOR OUTPUTS AND DIMENSIONS


TABLES BASED ON ΔT 60°C - MEAN WATER TEMPERATURE IN RADIATOR OF 80°C AND ROOM TEMPERATURE OF 20°C
RADIATOR OUTPUTS TO EN442 STANDARD - NB: 400 HIGH SIZES AVAILABLE FOR ORDER (NOT EX STOCK)




		Type 11 Single			
L-mm	H-mm	300	500	600	900
400	kW	0.286	0.440	0.513	0.720
500	kW	0.357	0.551	0.642	0.900
600	kW	0.429	0.661	0.770	1.080
700	kW	0.500	0.771	0.898	1.260
800	kW	0.572	0.881	1.027	1.440
900	kW	0.643	0.991	1.155	1.620
1000	kW	0.715	1.101	1.283	1.800
1100	kW	0.786	1.211	1.412	1.980
1200	kW	0.857	1.321	1.540	2.160
1400	kW	1.000	1.541	1.798	2.520
1600	kW	1.143	1.762	2.053	2.880
1800	kW	1.286	1.982	2.310	3.240
2000	kW	1.429	2.202	2.566	3.600
2300	kW	1.644	2.532	2.951	
2600	kW	1.858	2.863	3.336	
3000	kW	2.144	3.303	3.850	



		Type 21 Compact			
L-mm	H-mm	300	500	600	900
400	kW	0.419	0.629	0.731	1.035
500	kW	0.523	0.786	0.918	1.294
600	kW	0.628	0.913	1.096	1.553
700	kW	0.733	1.100	1.278	1.812
800	kW	0.837	1.257	1.461	2.071
900	kW	0.942	1.415	1.644	2.330
1000	kW	1.046	1.572	1.828	2.589
1100	kW	1.151	1.729	2.009	2.847
1200	kW	1.256	1.886	2.192	3.106
1400	kW	1.465	2.200	2.557	3.624
1600	kW	1.674	2.515	2.922	4.142
1800	kW	1.884	2.829	3.287	4.659
2000	kW	2.093	3.144	3.653	5.177
2300	kW	2.407	3.615	4.200	
2600	kW	2.721	4.087	4.748	
3000	kW	3.139	4.715	5.479	




		Type 22 Double			
L-mm	H-mm	300	500	600	900
400	kW	0.505	0.778	0.901	1.226
500	kW	0.631	0.972	1.128	1.533
600	kW	0.757	1.166	1.351	1.839
700	kW	0.883	1.361	1.576	2.146
800	kW	1.009	1.555	1.802	2.453
900	kW	1.136	1.750	2.027	2.759
1000	kW	1.262	1.944	2.252	3.066
1100	kW	1.388	2.139	2.477	3.372
1200	kW	1.514	2.333	2.702	3.679
1400	kW	1.766	2.722	3.153	4.292
1600	kW	2.019	3.111	3.603	4.905
1800	kW	2.271	3.499	4.054	5.518
2000	kW	2.523	3.888	4.504	6.131
2300	kW	2.902	4.472	5.180	
2600	kW	3.280	5.055	5.855	
3000	kW	3.785	5.832	6.758	

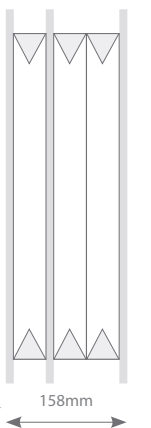


		Type 33 Triple			
L-mm	H-mm	300	500	600	900
400	kW	0.712	1.091	1.264	1.723
500	kW	0.889	1.363	1.580	2.153
600	kW	1.067	1.636	1.895	2.584
700	kW	1.245	1.909	2.211	3.015
800	kW	1.423	2.181	2.527	3.445
900	kW	1.601	2.454	2.843	3.876
1000	kW	1.779	2.727	3.159	4.307
1100	kW	1.957	2.999	3.475	4.738
1200	kW	2.135	3.272	3.791	5.168
1400	kW	2.491	3.817	4.423	6.030
1600	kW	2.846	4.363	5.055	6.891
1800	kW	3.202	4.908	5.686	7.752
2000	kW	3.558	5.453	6.318	8.614
2300	kW	4.092	6.271	7.266	
2600	kW	4.625	7.089	8.214	
3000	kW	5.337	8.180	9.477	

STANDARD BRACKETS SUPPLIED WITH DE LONGHI RADIATORS

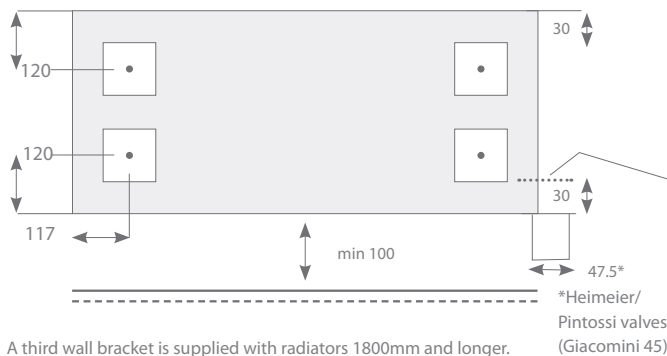


NOTE: A third wall bracket is supplied with radiators 1800mm and longer.
All measurements shown on diagrams in millimeters (not to scale)

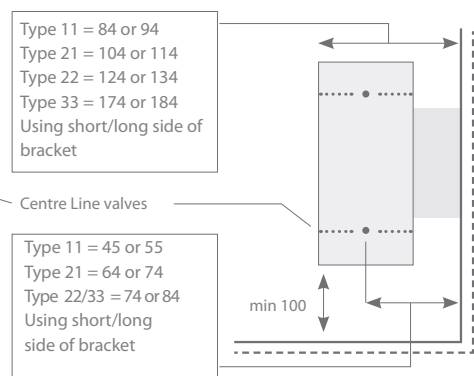

INSTRUCTIONS FOR PLACEMENT OF NOGGINS FOR DE LONGHI STEEL PANEL RADIATORS

For radiator heights 500, 600 & 900mm mark out the 1st measurement from the floor to the centre of the bottom noggin as shown on the right. Then mark out the centre of the top noggin using measurement as shown. For radiator height 300mm only one noggin is required set at 180mm from floor to centre of noggin. Suggested size for noggins; 90mm x 40mm framing timber.

NOTE: All measurements shown on diagrams in millimeters (not to scale)

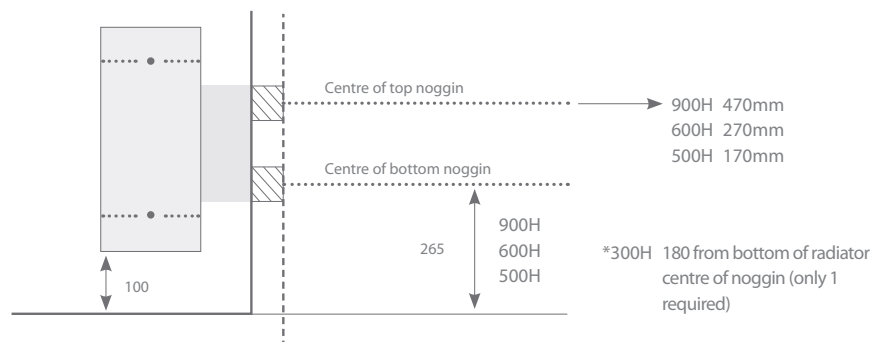

showroom 11 Fiveways Boulevard Keysborough VIC 3173

phone 1300 00 1800 fax (+613) 9798 5133

email enquiries@huntheat.com.au website www.huntheat.com.au